



Accessories



The combination of Metalworks, Teng Tools and Luna has enabled us to put together a complete range of rotary cutting tools that now includes drill bits for wood, masonry and metal including HSS twist drills, fully ground, 5% cobalt, Speedmaster, SDS plus, SDS Max, auger bits, speed bits and various accessories such as extensions, etc.

With the additional ranges of hole saws, taps and dies, conical drill bits, spot drills and spark plug thread repair kits almost every type of rotary cutting tool is covered with a variety of packs from individual to box packs of 10 drill bits.

Each of the three brands has been selected to reflect their particular strengths and all have quality levels that are specifically designed to meet the needs of professional industrial, construction and automotive engineers and technicians.

Drill chucks

Three jaw key chucks with conical attachment hole.
For use with electric hand power tools.



Stock No.	Clamping width mm	External diameter mm	Length (open) mm	Spanner DIN 6349/4	Drive	Price
200820108	0.5-10	34.5	49	S2	B12	£6.50
200820207	1-13	52	69	S3	B16	£20.60
200820306	3-16	49.5	75	S3	B18	£25.50
200820405	5-20	65	92	S4	B22	£51.00

Three jaw key chucks with hardened and ground jaws and key holes. Tapered mounting hole according to DIN238 or with threaded mounting hole. *denotes chucks with threaded mounted hole bored for screw lock for left rotation.



Stock No.	Clamping width mm	External diameter mm	Length (open) mm	Spanner DIN 6349/4	Drive	Price
200850105	1.5-13	42	59	S2	B12	£8.40
200850204	0.6-6	30	40	S1	3/8 x 24	£6.20
200850303	1.5-10	34	49	S2	3/8 x 24	£6.70
200850402*	1.5-10	34	49	S2	3/8 x 24	£6.70
200850501	1.5-13	42	59	S2	3/8 x 24	£8.40
200850600	1.5-13	42	59	S2	1/2 x 20	£8.40
200850709*	1.5-13	42	59	S2	1/2 x 20	£8.40
200850808	3-16	52	67	S3	1/2 x 20	£13.70
200850907	3-16	52	67	S3	B16	£13.70



Stock No.	Clamping width mm	External diameter mm	Length (open) mm	Spanner DIN 6349/4	Drive	Price
209900109	1.5-10	34	49	S1	3/8 x 24	£6.70
209900208	1.5-10	34	49	S1	1/2 x 20	£6.70
209900307	1.5-13	42	59	S2	1/2 x 20	£8.40
209900406	1.5-13	42.5	57	S2	B6	£8.40

Three jaw key chucks with chuck key. Chucks with threaded mounting holes are bored and have screw lock for left rotation.



Drill chucks


1/4" hexagon drive three jaw key chucks with chuck key. Jaws are hardened and ground. For right or left rotation.



Stock no	Clamping width mm	External diameter mm	Price
209930106	0-5-6.5	30	£7.90

Chuck keys

Replacement drill chuck keys for three jaw drill chucks.

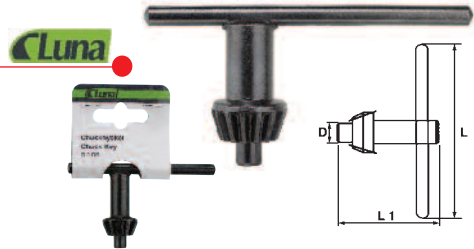

Stock No.	For chucks mm	Size D No	Size L1 mm	Size L mm	Price
200830206	10	6M	35	56	£1.00
200830404	13	13M	39	80	£0.90
200830503	16	16M	45	110	£1.40
200830701	20	-	45	110	£1.70

Keyless drill chucks


Quick clamping and self locking, three jaws - hardened and ground. With ball bearings. With tapered mounting hole according to DIN238 or with threaded mounting hole.



Stock No.	Clamping width mm	External diameter mm	Length (open) mm	Drive	Price
200860104	1-10	44	93	B12	£48.30
200860203	0-10	44	106	B16	£48.30
200860302	1-13	51	106	B16	£57.00
200860401	3-16	54	103	B16	£47.40
200860500	3-16	54	103	B18	£47.40
200860609	0-6.5	35	62.5	3/8 x 24	£66.10
200860708	0-8	35.8	70.5	3/8 x 24	£60.10
200860807	0-10	42.5	82.5	3/8 x 24	£48.30
200860906	1-13	46	95	1/2 x 20	£57.00
200861003	0.5-10	35.8	70.5	3/8 x 24	£37.30
200861102	0.5-10	35.8	70.5	1/2 x 20	£37.30
200861201	1-13	42.5	81.5	3/8 x 24	£42.60
200861300	1-13	42.5	81.5	1/2 x 20	£42.60
200861409	3-16	46	95	1/2 x 20	£56.00

Drill chucks for hammer drills

Safety chuck with mechanical locking system, especially designed for hammer drills. Three jaws - hardened and ground. With tapering mounting hole according to DIN238 or with threaded mounting hole.

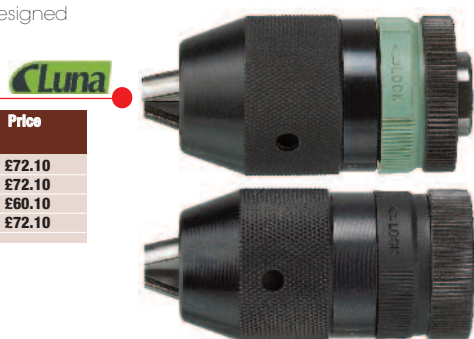

Stock No.	Clamping width mm	External diameter mm	Length (open) mm	Drive	Price
200880102	1-13	42.5	75.3	B12	£72.10
200880201	1-13	41	94	B16	£72.10
200880300	0.5-10	37	78	3/8 x 24	£60.10
200880409	1-13	42.5	74	1/2 x 20	£72.10



Accessories

Drill chucks for hammer drills

Safety chuck with self locking system, especially designed for hammer drills. High clamping force. Three jaws - hardened and ground. Bored through with screw locking device for both right and left rotation. A metal casing gives greater durability.



Stock No.	Clamping width mm	External diameter mm	Length (open) mm	Drive	Price
209920107	2-13	43	67-75	½ x 20	£16.10
200920206	0.8-10	41	54-64	⅜ x 24	£12.00
200920305	0.8-10	41	54-64	½ x 20	£12.00
200920404	1.5-13	43	62-75	⅜ x 24	£14.90
200920503	1.5-13	43	62-75	½ x 20	£14.90
200920701	1.5-13	46	69-83	½ x 20	£10.10

Precision chucks

Precision design with an accuracy of roundness of 0.05mm for high speed and precision. Quick clamping. Ball bearings. Three jaws - hardened and ground. With tapering mounting hole according to DIN238.



Stock No.	Clamping width mm	External diameter mm	Drive	Price
200890101	1-13	51	B16	£113.00
200890200	1-16	54	B18	£125.10

Coupling thread

A threaded adaptor, male both ends, for converting from female to male.



Stock No.	Thread UNF
200870103	⅜ x 24

DRILL BITS



HSS

A 19 piece HSS rolled straight shank twist drill bit set. DIN338 for drilling in iron, steel and metals.

Sizes	mm
	1.0, 1.5, 2.0, 2.5, 3.0, 3.5, 4.0, 4.5, 5.0, 5.5, 6.0, 6.5, 7.0, 7.5, 8.0, 8.5, 9.0, 9.5, 10.0



Stock No	PRICE
742120019	£17.30